


1. Запустить программу Benza – Автоматическая АЗС


1.1. Перейти по пути Настройки – настройки подключения и добавить подключение

1.2. Выбрать появившийся порт и нажать кнопку «Редактировать»

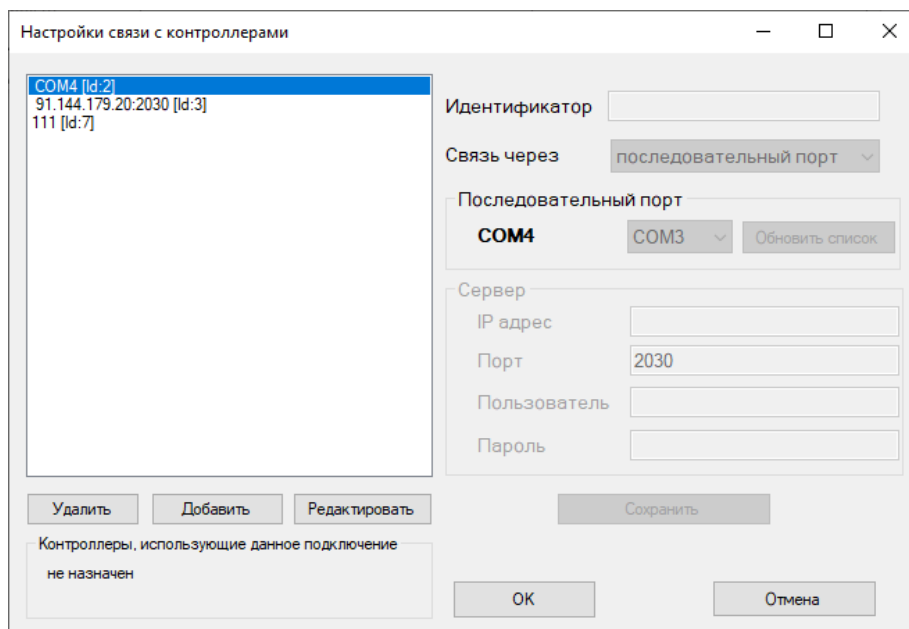

1.3. Добавить и отредактировать настройки.

1.3.1. Настройки для последовательного порта.

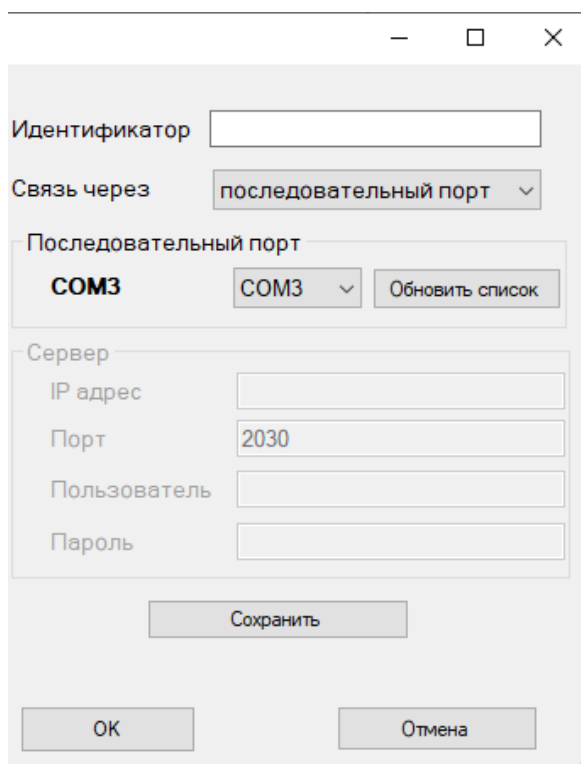

1.3.2. Настройки для GSM

The image shows a configuration window for GSM settings. It contains the following elements:

- Идентификатор** (Identifier): Text input field containing "GSM".
- Связь через** (Connection): Dropdown menu set to "сервер" (server).
- Последовательный порт** (Serial port): Section containing a dropdown menu set to "COM3" and a button labeled "Обновить список" (Refresh list).
- Сервер** (Server): Section containing four text input fields:
 - IP адрес** (IP address): "91.144.179.20"
 - Порт** (Port): "2030"
 - Пользователь** (Username): "Benza"
 - Пароль** (Password): "Benza"
- Сохранить** (Save): A button centered below the server fields.
- OK** and **Отмена** (Cancel): Buttons at the bottom of the window.

2. Настройка GSM Модема на контроллере.

2.1. Данные параметров: Точка доступа (APN), Имя пользователя и Пароль можно узнать у вашего оператора.

The image shows a software window titled "Настройка параметров контроллера (электромеханическая ТРК) - BS-02". The window is divided into two main sections. On the left is a sidebar labeled "Группы:" (Groups) containing a list of configuration categories: "Общие", "Насос", "Клапаны", "Датчик расхода", "Кнопка Старт\Стоп", "Метрология", "Налив топлива", "Уровнемеры", "Пользователи", "ТС", "GSM Модем" (which is highlighted in blue), "Принтер чеков", and "Индикаторы". The main area of the window is titled "GSM Модем" and contains the following settings:

- A checked checkbox labeled "Включить GSM модем".
- A section titled "GPRS" containing three input fields:
 - "Точка доступа (APN)" with the value "internet".
 - "Имя пользователя" with the value "gdata".
 - "Пароль" with the value "gdata".
- A section titled "Сервер" containing two input fields:
 - "IP адрес" with the value "91.144.179.20".
 - "Порт" with the value "2020".

At the bottom right of the window, there are two buttons: "ОК" and "Отмена".